


Powerful Submersible Pump

UP-4200

UP-5300


UP-7000

Submersible Pumps for Decorative Fountains, Waterfalls and Filters

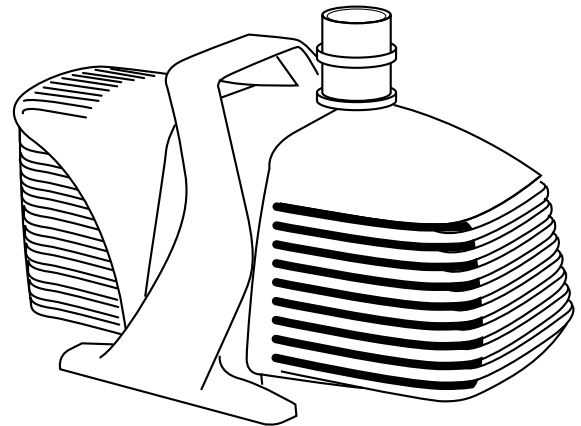

Pump Performance Chart

Stock No.	Watts	GPH	Max Head	Voltage	0'	6'	13'	19'	24'	L	W	H
UP-4200	338	4227	19.7'	120/60Hz	4227	3065	1453	0	0	17"	9"	9"
UP-5300	437	5284	21.3'	120/60Hz	5284	3804	2114	343	0	17"	9"	9"
UP-7000	537	6869	26.3'	120/60Hz	6869	4993	3303	1638	264	17"	9"	9"

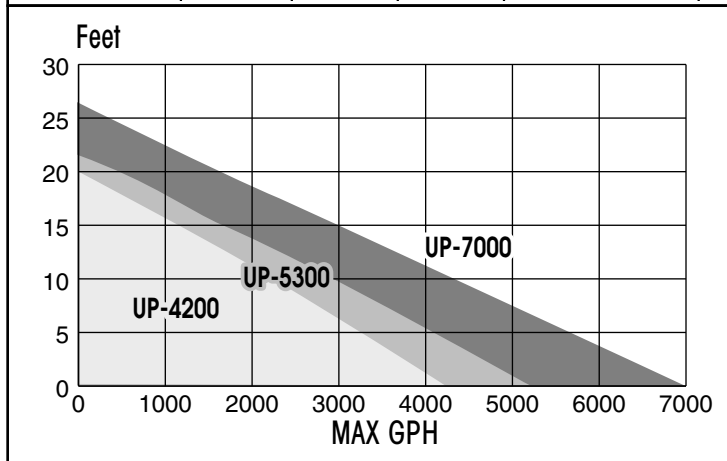

- Energy saving split tube motor.
- Outlet with 1-1/2" thread.
- Intake with 2" thread.
- Vortex impeller.
- Oversized prefilter area.
- Reduced frequency of pump cleaning due to optimum water flow.
- Ideal for use in polluted water, up to 6mm grain size.
- Simple maintenance with removable rotor assembly.
- Wear resistant ceramic bearings for continuous trouble free use.
- Overload protection by means of a thermal overload trip.

United Pump's pumps are efficient and reliable. These pumps may be disassembled without the use of tools for easy cleaning.

United Pump, Inc.
2357 Ventura Dr., Suite 102
Woodbury, MN 55125

Phone: 651-731-1001
Fax: 651-731-8404

